# F0451-902 Safety Shoe


S3 - BOA® Fit System

MASCOT® FOOTWEAR INDUSTRY

09

| | | | | | | |
|---|---|---|---|---|---|---|
| 1139 | 1140 | 1141 | 1142 | 1143 | 1144 | 1145 |
| 1146 | 1147 | 1148 | | | | |



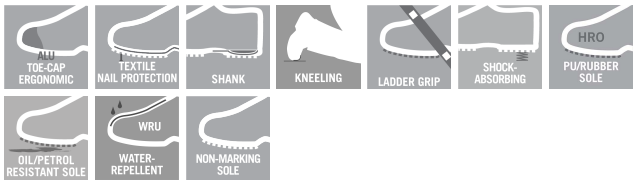


- The BOA® Fit System is made from extremely durable, high-quality materials. BOA® Fit System allows you to dial in to a fast, effortless, precision fit.
- The ergonomic aluminium toe cap provides more protection and gives greater freedom and comfort of movement.
- The flexible nail protection of special textile increases comfort and protects against cold. In addition, the textile midsole is larger and better protects against nails and sharp objects in a wider area compared with a steel midsole.
- Stabilisation with MASCOT's patented multi-function shank, makes our footwear suitable even when working on uneven surfaces or on ladders.
- Sole of PU/rubber is especially designed for demanding environments and can resist temperatures up to 300° C contact heat.
- The sole is oil and petrol resistant.
- ESD approved to EN IEC 61340-4-3: 2018 + EN 61340-5-1: 2016.

## Technical info

Opens and fastens with BOA® Fit System, which consists of a rotational dial, lace and guides. Ergonomically formed aluminium toe cap. Nail protection of special textile material. Stabilising multi-functional shank with integrated absorbing cushioning. Midsole made with PU. Sole made of rubber with extreme slip resistance. Removable insoles, anti-static and durable. Absorbs and removes moisture. Moulded PU scuff cap. The sole is oil and petrol resistant. Heat resistant sole up to 300°C contact heat. Ladder grip. Shock absorbing insole. Upper in water-repellent and breathable material. Suitable for working on the knees. Heel cap. Non-marking sole – no scuff marks. ESD approved to EN IEC 61340-4-3: 2018, EN 61340-5-1: 2016.

## Main material/upper material

Full grain leather

Size 42: 730 g



## Certifications

S3 ULTRA SLIP RESISTANT SOLE EN ISO20345 ESD

- Safety Class S3
- Ultra Slip Resistant Sole
- EN ISO 20345
- Electrostatic discharge (ESD)

**User**

